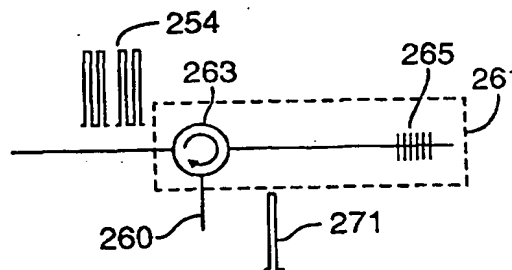
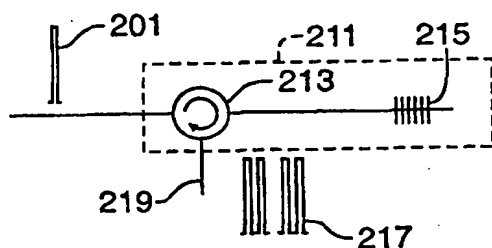


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

AI

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: G02B 6/293, 6/28, 27/46, 6/34, H04J 14/02, 3/24, 13/00, 14/08, C02B 6/26, H04N 9/02	A1	(11) International Publication Number: WO 00/29887 (43) International Publication Date: 25 May 2000 (25.05.00)
(21) International Application Number: PCT/US99/27257 (22) International Filing Date: 17 November 1999 (17.11.99) (30) Priority Data: 60/108,700 17 November 1998 (17.11.98) US (71) Applicant: TEMPLEX TECHNOLOGY, INC. [US/US]; Suite #1, 1850 Millrace Drive, Eugene, OR 97403 (US). (72) Inventors: GRUNNET-JEPSEN, Anders; 3220 Twin Elms, Eugene, OR 97408 (US). JOHNSON, Alan, E.; 2384 Sony Loop, Eugene, OR 97404 (US). MANILOFF, Eric, S.; 3160 Alyndale Drive, Eugene, OR 97404 (US). MOSSBERG, Thomas, W.; 548 Lynnbrook Drive, Eugene, OR 97404 (US). MUNROE, Michael, J.; 1639 Walnut Street, Eugene, OR 97403 (US). SWEETSER, John, N.; 3230 Onyx Street, Eugene, OR 97405 (US). (74) Agent: JONES, Michael, D.; Klarquist, Sparkman, Campbell, Leigh & Whinston, LLP, One World Trade Center, Suite 1600, 121 SW Salmon Street, Portland, OR 97204 (US).		(81) Designated States: CA, CN, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: CODES, METHODS, AND APPARATUS FOR OPTICAL ENCODING AND DECODING**(57) Abstract**

Encoders and decoders for applying composite codes to optical data signals include encoders (211, 231) and decoders (243, 261) for applying both subcodes and supercodes. The subcodes have a duration selected as less than or equal to an interchip duration or a chip duration of the supercodes. The encoders (211, 231) and decoders (243, 261) ("coders") include fiber Bragg gratings configured to encode or decode a subcode, a supercode, or a composite code. By coding with a subcode coder, a coder is reconfigurable by selecting different subcodes or supercodes. Communication systems and methods using composite codes are also described.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CODES, METHODS, AND APPARATUS FOR OPTICAL ENCODING AND DECODING

5

Field of the Invention

The invention pertains to optical communication systems.

Background of the Invention

10 Code-division-multiple-access (CDMA) methods have been used in satellite communication and wireless telephony. CDMA methods are spread-spectrum methods for multiplexing and demultiplexing a plurality of data-carrying electromagnetic signals onto a single transmission medium. These data signals are distinguished by encoding with
15 different complex spectral or temporal codes. The resultant spectra of the encoded data signals are much broader than the spectra of the uncoded data signals. The number of data signals that can be successfully multiplexed and demultiplexed in a CDMA system is dependent on the complexity of the coding. CDMA codes are
20 traditionally divided into "chips," defined as a temporal duration of the shortest temporal feature encoded onto the data signal. Larger numbers of chips permit larger numbers of users, or, alternatively, the less inter-user interference for a fixed number of multiplexed data signals.

Radio-frequency (RF) CDMA makes use of binary phase codes in
25 which each chip assumes one of two values for the phase of the electromagnetic field that carries data signals. Such binary codes can be generated in real time with fast sequences of shift registers. Code-generation algorithms for the production of binary CDMA code sets

include algorithms that generate Gold codes, Kasami codes, maximal sequence length codes, JPL codes, and Walsh codes.

One alternative to using these code sets is to generate new code sets with Monte Carlo or other code-search algorithms. However, as
5 the number of code chips increases, the computational time of these algorithms becomes impractically long. This computational time is further increased if non-binary CDMA code sets are needed, i.e., codes having chips that assume more than two levels.

Optical CDMA systems use passive optical encoding and decoding
10 with, for example, diffraction gratings. Since the coding and encoding are performed passively, no fast digital logic is needed to encode or decode the optical signal. Therefore, optical CDMA systems are not limited to the binary phase or amplitude codes used in RF CDMA.

Finding new code sets, particularly for use in optical
15 communication systems can be difficult and time-consuming. Therefore, methods and apparatus for generating code sets and especially large-chip-number code sets having predictable cross-talk characteristics are needed. Also needed are encoders and decoders for encoding and decoding, respectively, an optical field or other
20 electromagnetic signal using such codes.

Brief Description of the Drawings

FIG. 1 is a schematic diagram of a data-transmission system using 3-chip supercodes and 3-chip subcodes.

25 FIG. 2A is a schematic diagram of a subcode of an encoded data pulse.

FIG. 2B is a schematic diagram of a supercode of an encoded data pulse.

FIG. 2C is a schematic diagram of a composite-coded data pulse, obtained by combining the subcode of FIG. 2A with the supercode of FIG. 2B.

FIG. 2D is a schematic diagram of a subcode encoder that
5 produces a subcode-encoded data pulse.

FIG. 2E is a schematic diagram of a supercode encoder that receives the subcode-encoded data pulse of FIG. 2D and produces a composite-coded data pulse.

FIG. 2F is a schematic diagram of a supercode decoder that
10 receives a composite-coded data signal and produces a subcoded data signal.

FIG. 2G is a schematic diagram of a subcode decoder that receives a supercoded data signal and produces a decoded data signal.

FIG. 3A is a schematic diagram of a fiber Bragg grating for
15 encoding or decoding a subcode.

FIG. 3B is a schematic diagram of a fiber Bragg grating for encoding or decoding a supercode.

FIG. 4 is a schematic diagram of a reconfigurable encoder for applying a selected composite code.

FIG. 5A is a schematic diagram of a transmitter that transmits
20 optical signals coded with a composite code.

FIG. 5B is a schematic diagram of the reconfigurable encoder shown in FIG. 5A.

FIG. 6A is a schematic diagram of a fiber Bragg grating that
25 encodes a subcode.

FIG. 6B is a graph of refractive-index variations as a function of position in the fiber Bragg grating of FIG. 6A.

FIG. 6C is a schematic diagram of a fiber Bragg grating that encodes a supercode.

FIG. 6D is a graph of refractive-index variations as a function of position in the fiber Bragg grating of FIG. 6C.

FIG. 7 is a schematic diagram of a receiver that decodes an optical signal coded with a composite code.

5 FIG. 8A is a graph of power as a function of time for an optical signal encoded and decoded with a matched composite code.

FIG. 8B is a graph of power as a function of time for an optical signal encoded and decoded with unmatched composite codes.

10 FIGS. 9A-9C are graphs of power as a function of time for encoding and decoding an optical signal with a matched code and with unmatched codes.

FIGS. 10A-10B are graphs of power as a function of time for encoding and decoding an optical signal with a matched composite code and with unmatched composite codes.

15

Detailed Description

FIG. 1 is a schematic of a data transmission system 101 that produces a data signal 103 from a data source 105. As shown in FIG. 1, the data signal 103 is represented as a binary, on-off modulation of an electromagnetic carrier such as an optical carrier. The on-off modulation is selected for convenience only, and other modulations can include phase, amplitude, intensity, and frequency modulation. In addition, non-binary modulation having more than two modulation levels can be used.

25 A supercode encoder 107 receives the data signal 103 and applies a predetermined code R_i selected from a code set R to the data signal 103. For purposes of illustration, a code $R_i = \{1, -1, 1\}$ is selected and applied to a representative bit 109 of the data signal 103. As specified by the code R , the encoder 107 receives the bit 109 and

transforms the bit into a "supercoded" bit packet 111. The supercoded bit packet 111 includes super-coded bits ("superbits") 113-115 that are relatively delayed by a delay time T_{RC} , wherein T_{RC} is a supercode chip duration. In addition, the phase of the superbit 114 is inverted, while
5 the phases of the superbits 113, 115 are unchanged. The encoder 107 applies the code R_i to the entire data signal 103 to produce a supercoded data signal that is a sum of superbits corresponding to all respective bits of the data signal 103.

A subcode encoder 117 receives the supercoded data signal and
10 applies a code S_i selected from a code set S . For purposes of illustration, a code $S_i = \{-1, 1, -1\}$ is selected. The code S_i is applied to the supercoded bit packet 111 to produce a combined subcoded and supercoded ("composite-coded") bit packet 121 that includes subcoded bits 123, 125, 127, corresponding to respective superbits 113, 114,
15 115. The encoder 117 encodes each of the supercoded bits 113-115 by relatively delaying portions by a delay time T_{sc} wherein T_{sc} is a subcode chip duration, and changing the phase of the supercoded bits 113, 115, to produce the corresponding subcoded bits 123, 125, 127. The encoder 117 applies the code S_i to the supercoded data signal,
20 producing a composite-coded data signal.

The encoders 107, 117 apply codes from respective sets R , S to the data signal 103. If the sets R , S contain N_R and N_S codes, respectively, then $N_R \times N_S$ different encodings are available. For example, if sets R , S each include 5 codes, then 25 encodings are
25 possible. Thus, the number of available encodings increases as the product of N_R and N_S increases so that large numbers of encodings are possible even with small code sets. In addition, the sets R , S can be subsets of a large code set and can include different or identical codes.

In this way, a set of N codes can be used to produce N^2 different encodings.

FIG. 1 illustrates encoding, with two sets of codes (sets R , S), but additional code sets can be used to further increase the number of available encodings. Subcode bits 113-115 can be further encoded with a code set Q having N_Q codes, so that the number of available encodings is $N_R \times N_S \times N_Q$. Codes obtained by combining two or more code sets such as the code sets R , S are referred to herein as "composite codes."

The encoders 107, 117 can be electronic, acoustic, or optical encoders, depending on the type of signal to be encoded or decoded. Optical encoders are described in, for example, U.S. Patent Applications Nos. 09/354,851, TIME-WAVELENGTH MULTIPLE ACCESS OPTICAL COMMUNICATION SYSTEM AND METHOD, 09/115,331, 09/120,959, SEGMENTED COMPLEX FIBER GRATING, 09/115,331, SEGMENTED TASM GRATINGS, and U.S. Patent No. 5,812,318 which are incorporated herein by reference.

The codes R_i , S_i used above are selected as representative examples. More generally, codes include two or more "chips" that specify modulations to be applied to a signal. The chip modulations are applied to a signal at relative times differing by a chip duration T_c . Thus, a code and a chip duration specify an encoding of a data signal. A supercode is further specified by an interchip duration. A code R , having a total duration T_R , a number of chips N_R , and a chip duration T_{RC} , and a code S , having a total duration T_S , a number of chips N_S , and chip duration or interchip delay T_{SC} , are effectively orthogonal as decoded if $T_R \leq T_{SC}$. A composite code can be produced from the code R (a subcode), and from the code S (a supercode). The composite code has a given duration equal to the duration of the supercode and has a

number of chips equal to the product of the number of chips of the subcode and the supercode. The chip duration is equal to the subcode chip duration. In the composite code, the subcode is repeated a number of times equal to the number of chips in the supercode.

5 Code sets and chip durations of supercodes and subcodes (and sub-subcodes) are preferably selected so that a data signal encoded with a particular composite code is decoded only with a matching decoding composite code. Decoding with an unmatched composite code produces only a noise-like background or low amplitude "sidelobes" or
10 "crosstalk."

 Given temporal orthogonality between a supercode and the subcode (i.e., low-amplitude cross-correlation and noise-like background), composite code sets of sufficient orthogonality can be generated from a code set with a small number of chips if the codes of
15 the code set are sufficiently orthogonal. A code in a composite code set can be generated by using a selected code of the code set as a supercode and another selected code of the code set as a subcode. A composite code set comprises all combinations of supercodes and subcodes. For example, if a code set has M codes each containing N_m
20 chips, then the composite code set contains $M \times M$ codes each having $N_m \times N_m$ chips.

 FIG. 2A illustrates a single data bit after encoding with a 5-chip subcode that can be represented as $\{1, 1, 0, 1, 1\}$. The data bit is divided into five portions that are relatively delayed by a delay time T_{RC} .
25 In this code, one portion, corresponding to "0", has no data-pulse amplitude.

 FIG. 2B illustrates a data bit encoded with a 5-chip supercode that can be represented as $\{1, 1, 1, 0, 1\}$. The subcoded data bit is replicated once for each of the non-zero chips of the supercode and

each subcoded bit is multiplied by a code value associated with a corresponding supercode chip. Both the supercode and subcode have temporal features of approximately the same duration, but the chip-spacing features are greater (for the supercode) than the duration of the entire subcode, so that $T_R \leq T_{SC}$, wherein T_R is a duration of the subcode and T_{SC} is a supercode chip spacing. The total duration of the subcode of FIG. 2A is less than or equal to the interchip spacing of the supercode.

FIG. 2C illustrates a data bit after encoding with the subcode and supercode that produce the codings of FIGS. 2A-2B, respectively. The encoding of FIG. 2C is equivalent to encoding with a composite code defined by this subcode and supercode.

The procedure for generation of composite codes can be extended beyond the two sequential levels shown in FIG. 1 and FIGS. 2A-2C to include three or more levels to provide longer composite codes. Furthermore, composite code sets can be generated with code sets having different numbers of chips for the codes used to define the supercodes and subcodes.

Optical encoders and decoders for generating composite codes can include those disclosed in the references cited above. Using the linear spectral filtering techniques described in these references, composite codes can be optically encoded and decoded onto optical data streams. Representative encoders/decoders using optical circulators and reflective fiber Bragg gratings are discussed below. Other encoders/decoders use beam splitters, or diffraction gratings, to simultaneously encode or decode both a subcode and a supercode. In addition, a subcode and supercode can be encoded or decoded in any order, or simultaneously, and the subcoding and supercoding operations can be performed at a single location or at different locations.

FIGS. 2D-2E illustrate two-stage optical encoding using the codes of FIGS. 2A-2C. FIG. 2D shows a single incoming data pulse 201 that is received by a subcode encoder 211 comprising an optical circulator 213 and a fiber Bragg grating 215, selected to encode a selected subcode. A subcoded data pulse 217 exits the subcode encoder 211 through an exit port 219 of the optical circulator 213. As shown in FIG. 2E, a supercode encoder 231 receives the subcoded data pulse 217. The supercode encoder 231 comprises an optical circulator 233 and a fiber Bragg grating 235 that encodes a selected supercode. A data pulse 241 produced by the supercode encoder 231 is coded according to a composite code.

FIGS. 2F-2G illustrate two-stage optical decoding. FIG. 2F shows a supercode decoder 243 that receives the composite-code-encoded data pulse 241. The supercode decoder 243 comprises an optical circulator 251 and a fiber Bragg grating 253. The fiber Bragg grating 253 is selected to correspond to the supercode to be decoded. The fiber Bragg grating 253 removes the supercode from the data pulse 241 and a resulting supercode-decoded data pulse 254 exits via an exit port 255. The data pulse 254 corresponds to a subcode-encoded data pulse. If the fiber Bragg grating 253 decodes a supercode that does not match the supercode of the data pulse 241, then the output of the supercode decoder 243 is a noise-like, low-power signal.

FIG. 2G shows a subcode decoder 261 that receives the subcode-encoded data pulse 254. The subcode decoder 261 comprises an optical circulator 263 and a fiber Bragg grating 265 for decoding a selected subcode. A decoded data pulse 271 exits the subcode decoder through an exit port 260 of the optical circulator 263. If the data pulse 254 is encoded with a subcode that matches the fiber Bragg grating 265, then the subcode is stripped and the output of the subcode

decoder 261 is a non-encoded optical data pulse. If the subcode of the data pulse 254 does not match that of the subcode decoder 261, then the output of the subcode decoder 261 is a noise-like, low-power signal.

FIG. 3A is a schematic diagram of a segmented fiber Bragg grating ("fBg") 301 for encoding or decoding a subcode. The fBg 301 comprises grating segments 305 and fiber lengths 355. The grating segments 305 have periodic variations in an index of refraction of a fiber core or cladding, as discussed in U.S. Patent Application No. 09/120,959. The grating segments 305 and the fiber length 407 extend a length corresponding to a subcode chip time T_{RC} along the direction 307. The fBg 301 has 5 chip segments 311-315 and encodes a code $R = \{1, 1, 0, 1, 1\}$.

FIG. 3B is a schematic diagram of an fBg 351 for encoding or decoding a supercode. The fBg 351 comprises grating segments 353 and fiber lengths 355. The grating segments 353 have lengths corresponding to T_{RC} of the fBg 351 but are separated by a length corresponding to a chip number times T_{RC} , i.e., $5T_{RC}$ for the example. The fBg 351 encodes a 5-chip supercode and has 5 chip segments 361-365.

For efficient subcode and supercode encoding/decoding, grating segment lengths are approximately equal for a matched subcode and supercode fBg. In addition, the spatial period of the chip segments 361-365 of the supercode grating 351 is larger than the total length of the subcode grating 301. This guideline is a result of matching the bandwidths of the subcode and supercode fBgs. Also the total duration of a subcode is preferably less than or equal to the duration of a supercode chip (i.e., the chip segments 361-365). Similar guidelines apply to other linear spectral filtering devices used for encoding and decoding of subcodes and supercodes.

FIG. 4 is a schematic diagram of a switched encoder 400 that can apply any of a hundred distinct composite codes onto an input data pulse. (A corresponding switched decoder has a similar construction.) The switched encoder 400 of FIG. 4 receives a single data pulse 402 or
 5 multiple data pulses from a modulated data source 401 at an optical circulator 403. The optical circulator 403 delivers the data pulse to a 1x10 switch 405 that selectively directs the data pulse to one of ten segmented fiber Bragg gratings 407-416 as controlled by an address selector 406. Each of the fiber Bragg gratings (fBgs) 407-416 is
 10 selected to encode a selected supercode.

After supercode encoding, the circulator 403 directs a supercoded data pulse 422 produced by the fBgs 407-416 to an optical circulator 421. The circulator 421 directs the pulse 422 to a 1x10 switch 431 that selects one of the subcoded fBgs 431-440 as directed
 15 by the address selector 406. A composite-code-encoded pulse is then produced and direct to an output 443 by the circulator 421. By selecting one each of the ten supercodes and subcodes (i.e., one each of the fBgs 407-416 and 431-440, respectively), 100 composite codes can be applied.

20 An N-chip code C is conveniently represented as a set $\{C_1, \dots, C_N\}$ of complex or real chip modulations C_i to be applied to an optical signal. In addition to these chip modulations, a k th chip includes a modulation $\exp(-j\omega_k T)$. For subcodes having temporally adjacent chips, $T = T_{\text{chip}}$ and for supercodes, $T = T_{\text{Dchip}}$, where T_{Dchip} is a temporal chip
 25 spacing.

FIG. 5A is a schematic diagram of a representative transmitter 501 that comprises a distributed feedback (DFB) laser 503 that receives an electrical data signal 505 and produces an optical data signal 507. As shown in FIG. 5A, the electrical data signal 505 and the optical data

signal 507 are binary amplitude-modulated signals. The optical data signal 507 produced by the DFB laser 503 comprises a series of laser pulses 509 or "bits" of duration of about $T_{\text{pulse}} = 25$ ps and having an optical bandwidth BW_{pulse} of about 35 GHz. The DFB laser 503 emits
5 the laser pulses 509 at a repetition rate of about 2.5 Gbit/s. Each of the laser pulses typically corresponds to a "1" bit in the electrical data signal 505 and no laser pulses are emitted for the "0" bits. The DFB laser 503 can be used with an optical modulator so that the DFB laser 503 emits a series of laser pulses at a selected bit rate, and the modulator selectively
10 absorbs or otherwise modulates the pulses according to the electrical data signal 505. An encoder 511 receives the optical data signal 507 and produces a composite-coded optical signal 513 that is transmitted on an optical fiber 515. The encoder includes a code-selection input 517 through which an i th subcode and a j th supercode are selected.

15 Referring to FIG. 5B, the encoder 511 comprises optical circulators 521, 523, optical switches 525, 527, and fiber Bragg gratings 531-536. The optical circulator 521 directs the optical data signal 505 to the optical switch 525. The optical switch 525 is responsive to an input 541 that directs the optical data pulse 505 to
20 one of several output ports 543-545 (corresponding to $j = 1, 2$, or 3 respectively). As shown in FIG. 5B, the optical switch 525 has three outputs 543-545 that connect to the fiber Bragg gratings 531-533, respectively. The fiber Bragg gratings 531-533 encode respective subcodes onto the input optical signal 505. The fiber Bragg grating 531
25 is selected ($j = 1$) and reflects the optical signal 505 back to the circulator 521, producing a subcoded optical signal. The circulator 521 directs the subcoded optical signal to the circulator 523 that directs the subcoded optical signal to the optical switch 527. The optical switch 527 is responsive to an input 551 that permits selection of an i th

supercode (for $i = 1, 2, 3$) by selecting a corresponding fiber Bragg grating from the fiber Bragg gratings 534-536. In FIG. 5B, the supercode corresponding to $i = 1$ is selected, i.e., corresponding to the fiber Bragg grating 534. The fiber Bragg grating 534 reflects the subcoded optical signal, producing a supercoded and subcoded (i.e., composite-coded) optical signal that is directed back to the optical switch 527, the optical circulator 523, and to a fiber 515.

In a representative embodiment, a set of three 3-chip codes, $\{1, -1, 1\}$, $\{1, -1, -1\}$, and $\{1, 1, 1\}$ corresponding to $i = j = 1, 2, 3$, respectively, is used for the subcodes and supercodes. Nine composite codes are formed from these codes, each of the nine codes comprising nine chips. The complete set of these nine nine-chip codes is:

i	j	Code
1	1	$\{1, -1, 1, -1, 1, -1, 1, -1, 1\}$
1	2	$\{1, -1, -1, -1, 1, 1, 1, -1, -1, 1\}$
1	3	$\{1, 1, 1, -1, -1, -1, 1, 1, 1\}$
2	1	$\{1, -1, 1, -1, 1, -1, -1, 1, -1\}$
2	2	$\{1, -1, -1, -1, 1, 1, -1, 1, 1\}$
2	3	$\{1, 1, 1, -1, -1, -1, -1, -1, -1\}$
3	1	$\{1, -1, 1, 1, -1, 1, 1, -1, 1\}$
3	2	$\{1, -1, -1, 1, -1, -1, 1, -1, -1\}$
3	3	$\{1, 1, 1, 1, 1, 1, 1, 1, 1\}$

Table. 1. Composite codes produced with the 3-chip codes $\{1, -1, 1\}$, $\{1, -1, -1\}$, and $\{1, 1, 1\}$ used as both subcodes and supercodes.

For the subcodes, a chip time delay T_{sub} is selected that is less than or equal to the bit duration of the optical data signal, i.e., T_{sub} is less than or equal to about 25 ps. For convenience, T_{sub} is chosen to be 25 ps.

FIG. 6A is a schematic of a fiber Bragg grating 601, such as any of the fiber Bragg gratings 531-533, for encoding a subcode selected from the above 3-chip codes. The fiber Bragg grating 601 includes grating segments 603-605 that have respective periodic variations in

refractive index in a core 607. In an alternative configuration, refractive-index variations can be provided in a cladding region 609. Optical signals propagate along a z-axis of the fiber Bragg grating 601.

FIG. 6B is a graph of refractive-index variations of the grating segments 603-605. In the fiber Bragg grating 601, an optical data signal propagates a distance L in a time t given by $t = 100L$ ps/cm. (This relationship is typical of silica-based optical fibers). For a 3-chip subcode with $T_{\text{sub}} = 25$ ps, each of the grating segments 603-605 of the fiber Bragg grating 601 are 2.5 mm long ($25 \text{ ps}/(100 \text{ ps/cm})$), for a total length of 7.5 mm. Bragg gratings are defined in the segments 603-605 each having a periodic variation in refractive index of a period that depends on the wavelength λ of the optical data signal and the refractive index n_{core} of the fiber core 607. For telecommunications fibers n_{core} is usually about $n_{\text{core}} = 1.5$. For a DFB wavelength of 1550 nm, the grating period about 516 nm.

The fiber Bragg grating 601 encodes an optical signal with a selected code based upon the relative phase shifts of the spatial variations in refractive index in the segments 603-605. As illustrated in FIG. 6B, the fiber segment 604 has a 180-degree phase shift with respect to fiber segments 603, 605 so that these segments correspond to the subcode $\{1, -1, 1\}$. (If an absolute phase reference is specified, this and other codes can be specified in terms of absolute phases as well as phase differences.)

FIG. 6C is a schematic view of a fiber Bragg grating 651 for encoding a supercode (a supercode fiber), such as the fiber Bragg gratings 534-536. The supercode fiber 651 includes grating segments 653-655 having refractive-index variations selected based upon the laser pulse width and bandwidth. As shown in FIG. 6C, the grating segment lengths are selected to equal the subcode grating-segment lengths of

2.5 mm. The separation of the supercode grating segments is selected so that the time delay between adjacent chips is sufficient to span a subcoded laser pulse. Because the total duration of a subcode corresponds to a fiber Bragg grating length of 7.5 mm, the supercode grating segments have a 7.5-mm separation, corresponding to T_{sc} . The grating segments of the supercode grating 651 are similar to those of the subcode grating segments 603-605, having the same spatial period Λ and the same relative phases, i.e., segment 654 is 180 degrees out of phase from segments 653, 655, but this phase difference is not shown in FIG. 6D.

FIG. 7 is a schematic view of a receiver 701 that decodes and transduces a composite-coded optical signal produced by the encoder of FIG. 5B into an electrical signal. The receiver 701 comprises a decoder 703 that includes fiber Bragg gratings 705-710 that are selected to decode the composite codes encoded by the encoder of FIG. 5B. In addition, the receiver 701 comprises a photodetector 711, amplifier 713, and thresholding electronics 715. The photodetector 711 converts an optical signal into an electrical signal and the thresholding electronics 715 provide an electrical signal corresponding to the decoded optical signal with sidelobes and/or noise-like backgrounds attenuated.

The decoder fiber gratings 705-710 are selected to decode the composite codes (combined subcodes and supercodes) used by the encoder. The decoder fiber grating 705-710 corresponds to a code C used for encoding and corresponds to a code D , wherein $D_i = C_{nc-i}^*$. For fiber Bragg gratings having moderate or low grating-segment reflectivities, the decoder gratings are identical to the encoder gratings but with the optical signals to be coded and decoded input to the fiber Bragg gratings from different directions. For example, an end 721 of the fiber grating 705 is used as an input for decoding, and an end 723 is

used as an input for decoding. Alternatively, the ends 721, 723 can be used as inputs for encoding and decoding, respectively.

The decoder 703 includes optical circulators 727, 729 and optical switches 731, 733. The optical switches are responsive to inputs that
5 select a j th subcode and an i th supercode for decoding a composite code. Thus, the decoder 703 is reconfigurable. If reconfigurable coding is unnecessary, then a single fiber Bragg grating can be provided that encodes an optical signal with a composite code, and a single matched fiber Bragg grating can serve to decode this composite code. Providing
10 separate fiber Bragg gratings for subcodes and supercodes is beneficial for reconfigurable coding.

Decoding of a code C (either a subcode or supercode) having N chips, i.e., $C = \{C_1, C_2, \dots, C_N\}$ is accomplished with a code
 $D = \{D_1, D_2, \dots, D_N\}$, wherein $D_i = C_{N-i}^*$, where "*" denotes complex
15 conjugation. A decoded optical signal E_{decode} is then a sum (or integral) over all chips so that $E_{\text{decode}} = \sum C_i D_{j-i}$. This sum is similar to an cross-correlation.

FIGS. 8A-8B illustrate decoded optical signals produced with a matched decoder and an unmatched decoder, respectively. The
20 matched decoded output signal of FIG. 8A includes a correlation peak 803 corresponding to the input laser pulse. The matched decoded output also includes some power in one or more sidelobes 805 and a noise-like background 807. In contrast, the unmatched decoded output of FIG. 8B includes sidelobe peaks 809 superimposed on a noise-like
25 background 811.

For purposes of illustration, configurable encoding and decoding is described above with reference to 3-chip and 5-chip codes. Larger numbers of chips and various coding methods (for example, phase codes or multilevel phase and/or amplitude codes) can be used. Codes

having larger numbers of chips generally produce lower crosstalk (reduced sidelobe amplitude and noise-like background amplitude) and permit larger numbers of optical signals to be coded onto a single optical fiber. The higher numbers of channels requires fiber grating codes

- 5 having larger numbers of grating segments, and can be more expensive and difficult to implement. For many applications, the number of channels is selected in consideration of these factors.

FIGS. 9A-9C illustrate decoded optical signals 901, 903, 905, respectively, produced by decoding a composite-coded optical signal
10 (coded with $\{1, -1, -1\}$) with codes $\{1, -1, 1\}$, $\{1, -1, -1\}$, and $\{1, 1, 1\}$, respectively. A maximum power associated with decoding with an unmatched code is referred to as "crosstalk" or a "sidelobe." As shown in FIGS. 9A and 9C, the crosstalk for these codes is 4. A maximum power produced in decoding with a matched code is referred to as a
15 decoded signal level. As shown in FIG. 9B, the decoded signal level for these codes is 9.

FIGS. 10A-10C illustrate decoded optical signals 1001, 1003, 1005, respectively, produced by decoding a composite-coded optical signal (coded with $\{1, -1, -1\}$) with codes $\{1, -1, 1\}$, $\{1, -1, -1\}$, and $\{1,$
20 $1, 1\}$, respectively. A maximum power associated with decoding with an unmatched code is referred to as "crosstalk" or a "sidelobe." As shown in FIG. 10C, the crosstalk for these codes is 36. A maximum power produced in decoding with a matched code is referred to as a decoded signal level. As shown in FIG. 10A, the decoded signal level
25 for these codes is 81. These longer codes do not necessarily produce an improved worst-case ratio of decoded signal to crosstalk, i.e. the worst-case ratio is 9:4, but in other cases the signal-to-crosstalk ratio is as large as 81:4. The worst-case ratio generally obtains for encoding and decoding with the same supercode but with a different subcode, or

with the same subcode but a different supercode. For composite codes formed of three or more codes, the greater the number of code mismatches in encoding and decoding, the lower better the signal-to-crosstalk ratio.

5 For convenience above, "encoder" and "encoding" were used with reference to applying a code to an optical signal, and "decoder" and "decoding" were used with reference to removing or stripping a code from an optical signal. The terms "coder" and "coding" can be used to describe both applying and removing a code. In addition,
10 decoding does not necessarily return an encoded optical data signal to its form prior to encoding, but removes the code sufficiently to permit data recovery from the optical data signal. Nevertheless, as used herein, decoding is referred to as "removing" or "stripping" a code from an optical data signal.

15 Representative embodiments were discussed with respect to coding optical signals, but electric signals (such as radio-frequency signals) and acoustic signals can be similarly coded. Optical signals are typically described as electromagnetic radiation of wavelengths between about 100 nm and 0.1 mm, but longer and shorter wavelengths can be
20 included. In addition, subcodes are illustrated in which there are no temporal gaps between chips. In general, time chips need not be adjacent.

 Having illustrated and demonstrated the principles of the invention in a example embodiments, it should be apparent to those skilled in the
25 art that these embodiments can be modified in arrangement and detail without departing from such principles. We claim as the invention all that comes within the scope of these claims.

We claim:

1. A coder for coding a signal with a composite code, the coder comprising:

5 a subcode encoder situated and configured to receive the signal and apply a subcode to the signal; and

 a supercode encoder situated and configured to receive the signal and apply a supercode to the signal, wherein the total duration of the subcode is less than or equal to an interchip spacing of the supercode.

10

2. The code of claim 1, wherein the signal is an optical signal.

3. The coder of claim 2, wherein the subcode encoder is situated and configured to direct the optical signal to the supercode encoder
15 after applying the subcode.

4. The coder of claim 2, wherein the supercode encoder is situated and configured to direct the optical signal to the subcode encoder after applying the supercode.

20

5. The coder of claim 2, wherein the supercode has a number of chips N_{Csuper} and the subcode has a number of chips N_{sub} , wherein N_{sub} is not equal to N_{Csuper} .

25 6. The coder of claim 2, wherein the supercode encoder includes a fiber Bragg grating.

7. The coder of claim 2, wherein the subcode encoder includes a fiber Bragg grating.

8. A reconfigurable coder that applies a composite code to an optical data signal; the coder comprising:

a plurality of coders corresponding to respective subcodes;

a plurality of coders corresponding to respective supercodes;

5 an optical switch; and

an optical addressor that selects a composite code by configuring the optical switch so that the optical data signal is coded by at least a selected one of the plurality of subcodes and a selected one of the plurality of supercodes, wherein the optical addressor designates the
10 selected subcode and the selected supercode.

9. The reconfigurable coder of claim 8, wherein the plurality of coders corresponding to subcodes are respective fiber Bragg gratings.

15 10. The reconfigurable coder of claim 8, wherein the plurality of coders corresponding to supercodes are respective fiber Bragg gratings.

11. The reconfigurable coder of claim 8, wherein the subcodes have durations that are less than or equal to an interchip duration of the
20 supercodes.

12. A method of encoding a data signal, comprising:

applying a subcode to the signal, the subcode including N_{sub} code chips of duration T_{Csub} ; and

25 applying a supercode to the signal, either prior to or after the subcode is applied, the supercode including N_{super} chips of duration T_{Csuper} .

13. The method of claim 12, wherein the signal is an optical signal.

14. The method of claim 13, wherein $(N_{sub}) T_{Csub}$ is less than or
5 equal to T_{Csuper} .

15. The method of claim 14, further comprising:
selecting a code; and
defining the supercode and subcode based on the code.

10

16. A method of reconfigurably coding an optical data signal,
comprising:

selecting a set of codes for use as supercodes;
selecting a set of codes for use as subcodes; and
15 forming a set of composite codes based on the set of
subcodes and the set of supercodes; and
applying at least one of the composite codes to the optical data
signal.

20

17. The method of claim 16, further comprising determining an
interchip duration for a supercode to be greater than or equal to a
duration of a subcode.

18. The method of claim 16, wherein the code sets selected for
25 use as supercodes and subcodes are the same.

19. The method of claim 16, further comprising providing fiber
Bragg gratings for applying a subcode portion of the composite codes.

20. The method of claim 16, further comprising providing fiber Bragg gratings for applying a supercode portion of the composite codes.

21. A method of coding an optical signal with a composite code,
5 comprising:

applying to the optical signal a subcode R having a total duration T_{sub} , a number of chips N_{sub} , and a chip duration T_{Csub} ; and

applying a supercode S having a total duration T_{super} , a number of chips N_{super} , and a chip duration T_{Csuper} , wherein $T_{\text{sub}} \leq T_{\text{Csuper}}$, wherein

10 applying the subcode R and the supercode S encodes the optical signal with the composite code.

22. The method of claim 21, further comprising selecting the subcode R and the supercode S to strip a composite code from the
15 optical signal.

23. The method of claim 21, wherein the composite code has a number of chips equal to $(N_{\text{sub}})(N_{\text{super}})$.

20 24. The method of claim 21, further comprising selecting a set of sub-subcodes having a duration less than or equal to a duration of a subcode.

25 25. A system for transmitting and receiving an optical data signal, comprising:

an encoder situated and configured for applying a composite code to the optical data signal;

a transmission medium situated and configured to receive the optical data signal to which the composite code is applied; and

a decoder for stripping the composite code from the optical data signal.

26. The system of claim 25, wherein the encoder is
5 reconfigurable to encode a set of composite codes.

27. The system of claim 26, wherein the encode includes a set of fiber Bragg gratings for encoding the set of composite codes.

FIG. 1

1/9

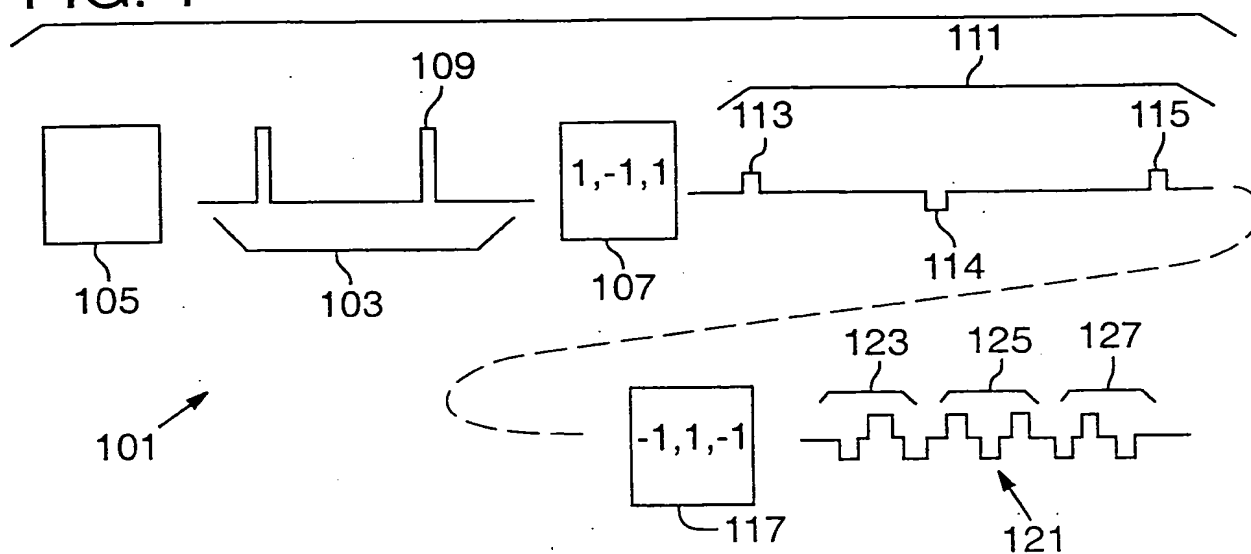


FIG. 2A

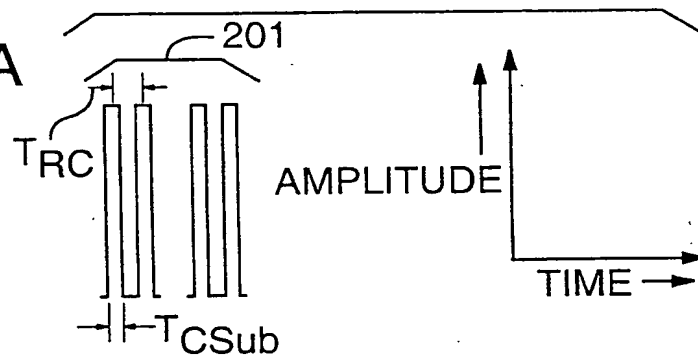


FIG. 2B


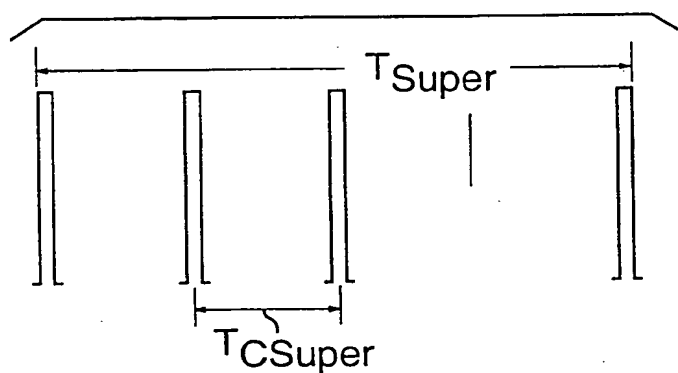


FIG. 2C

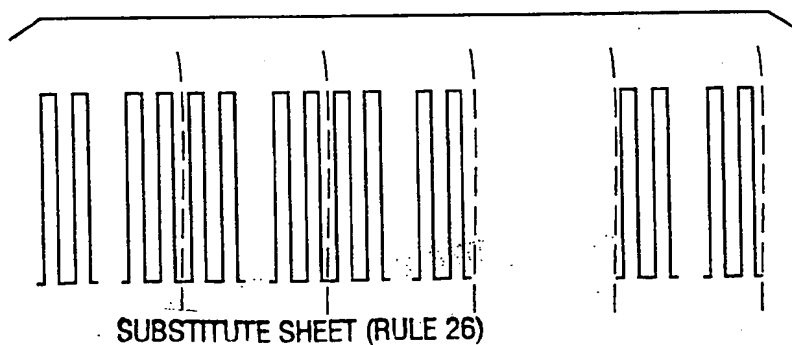

2/9

FIG. 2D

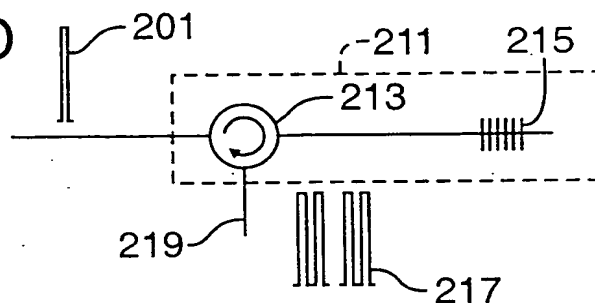


FIG. 2E

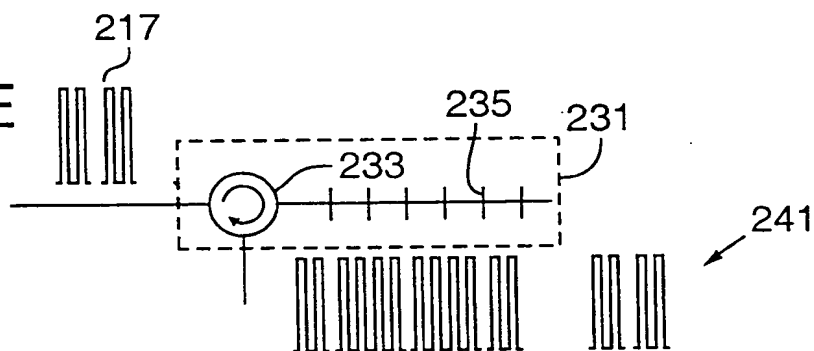


FIG. 2F


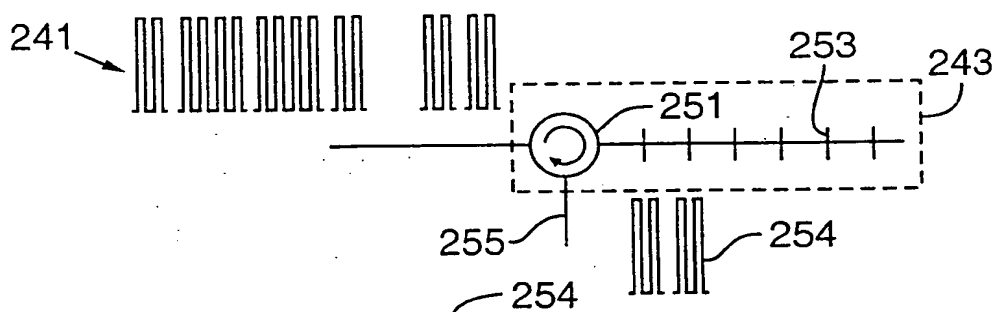


FIG. 2G

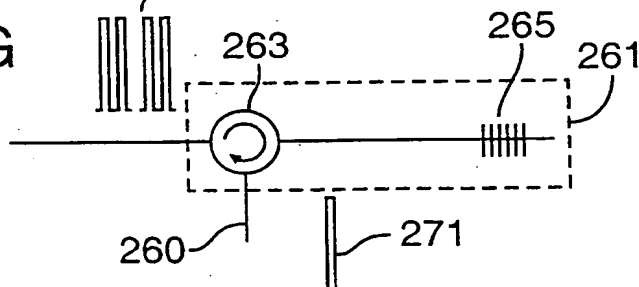

3/9

FIG. 3A

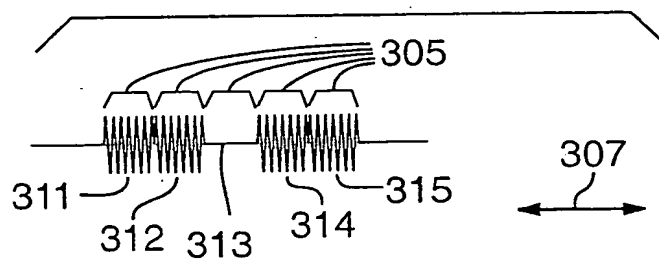


FIG. 3B


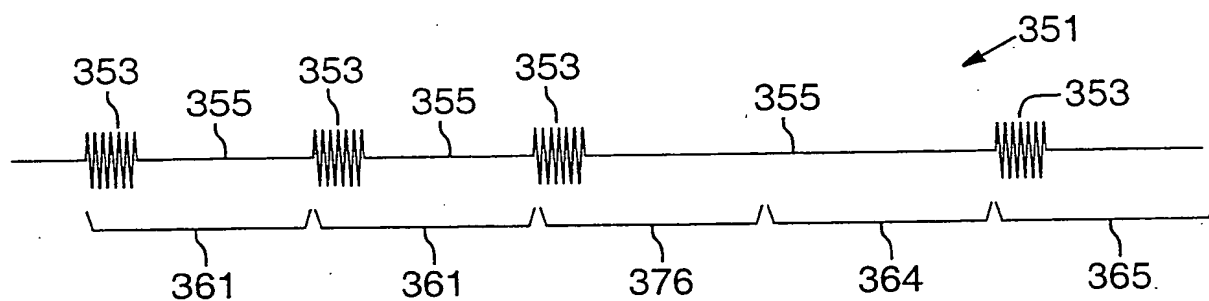


FIG. 4

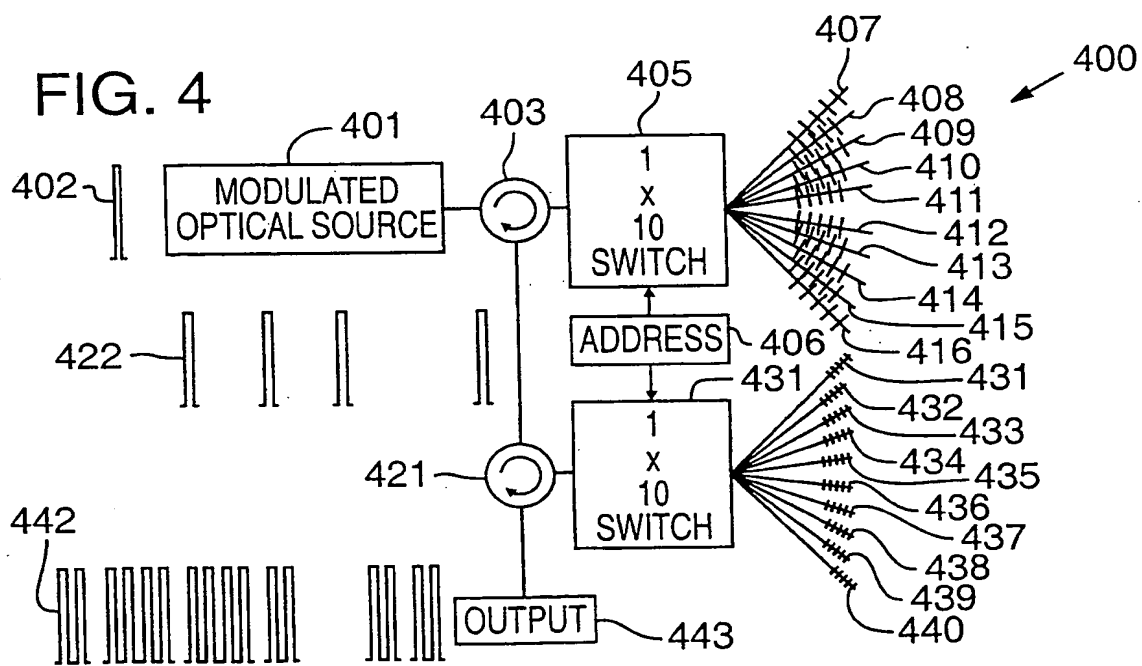

4/9

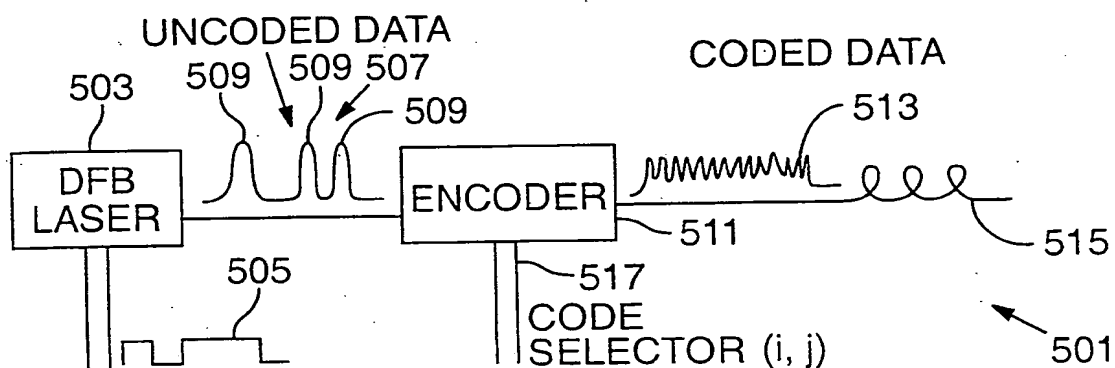


FIG. 5A

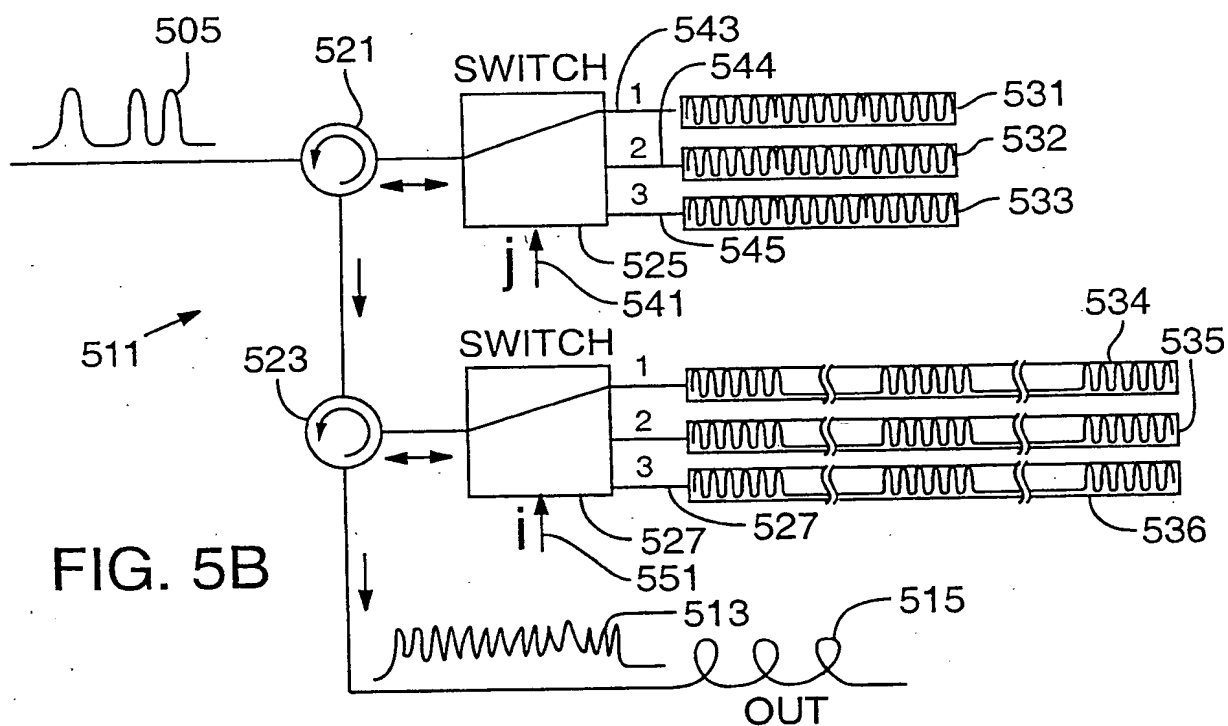


FIG. 5B

5/9

FIG. 6A

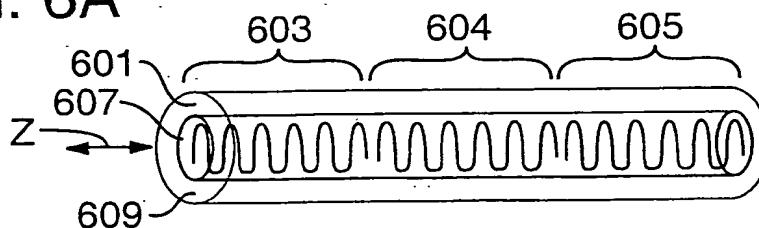


FIG. 6B

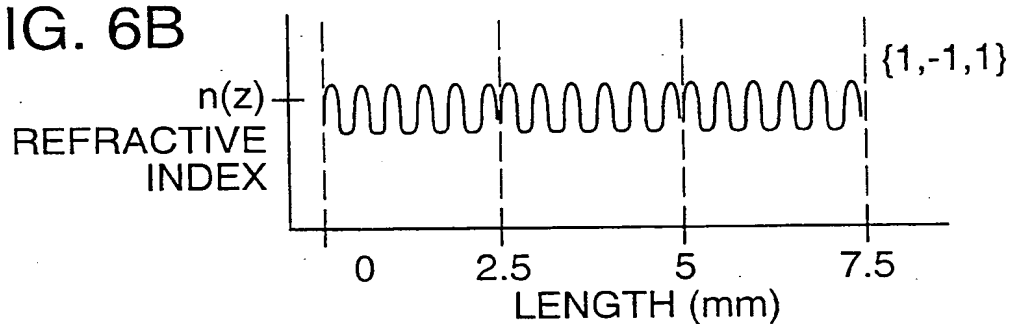


FIG. 6C



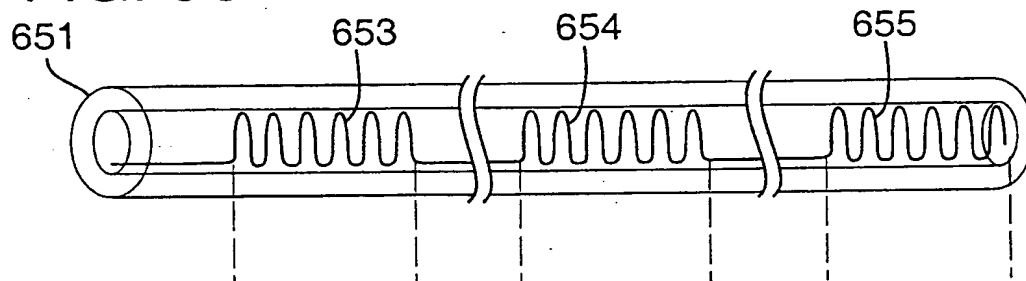


FIG. 6D

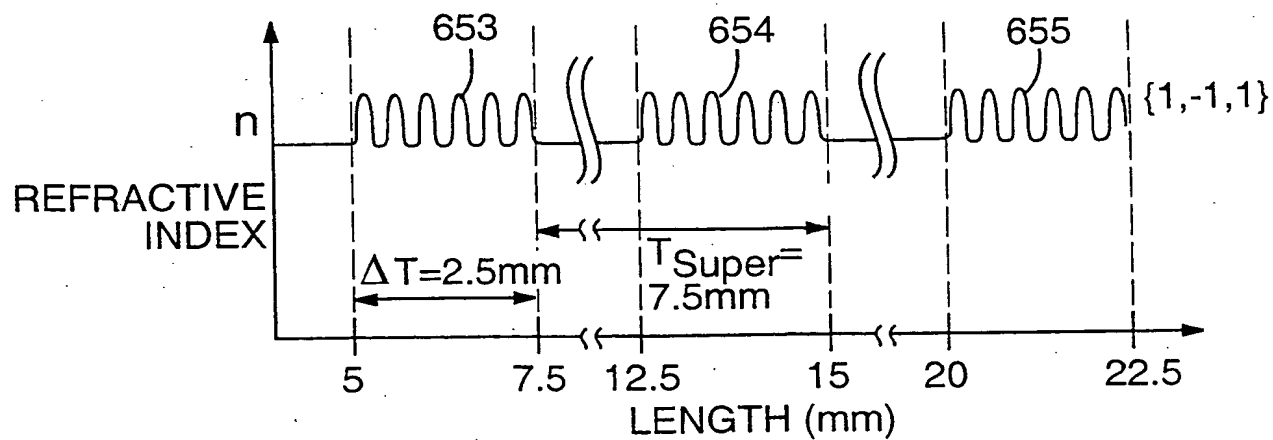

6/9

FIG. 7

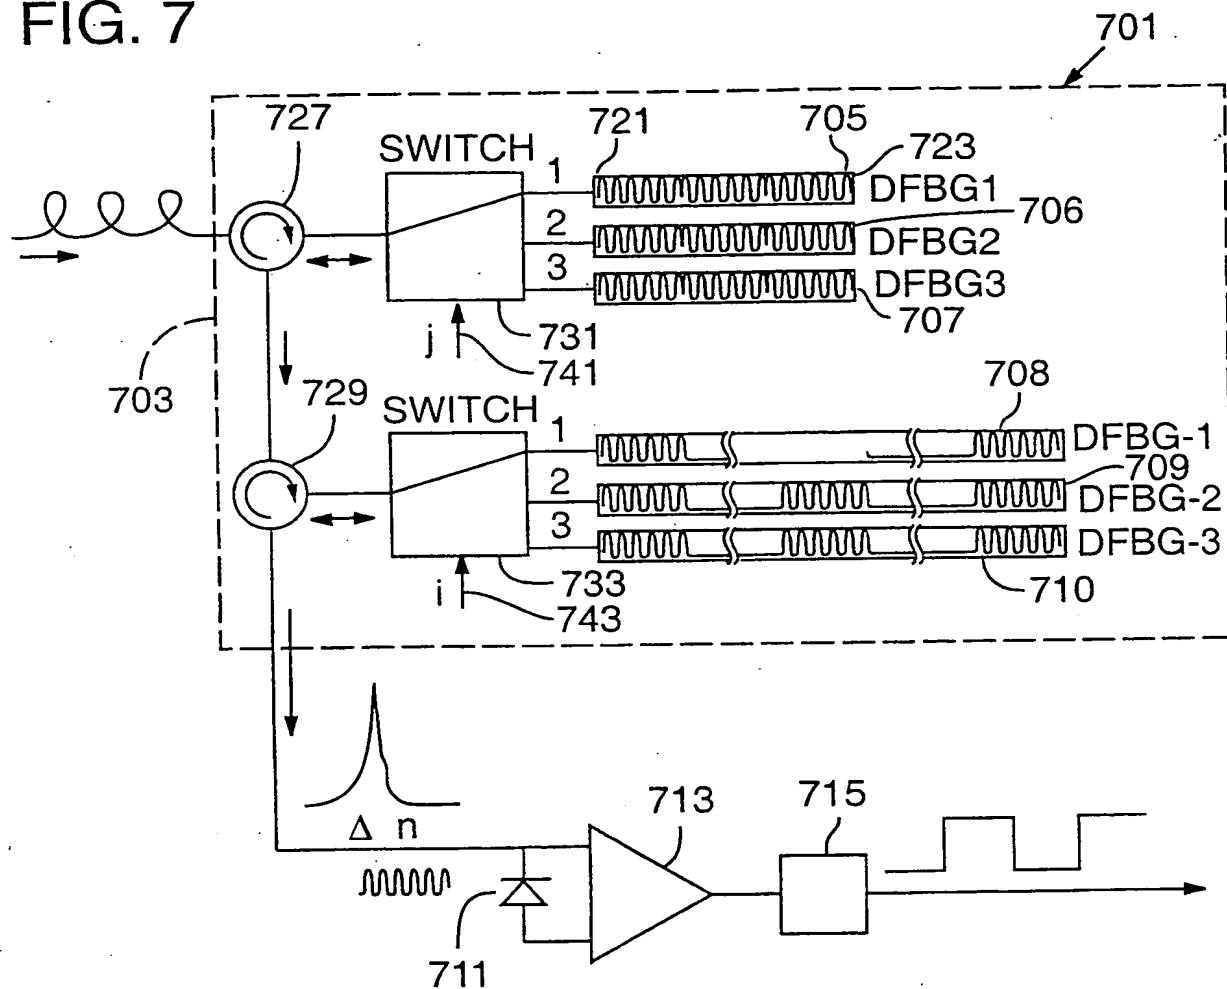

7/9

FIG. 8A


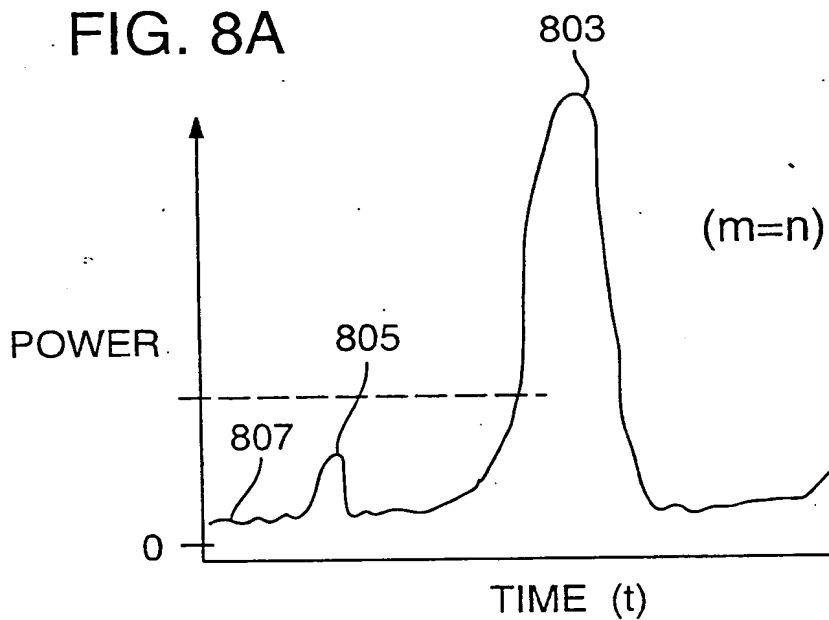


FIG. 8B

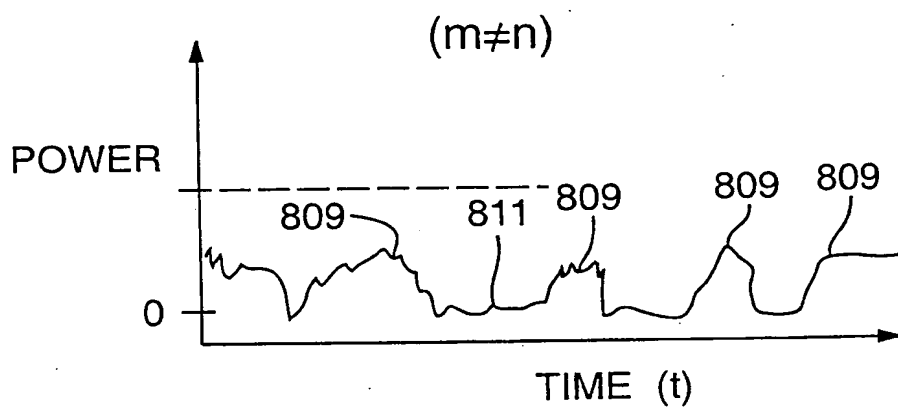

8/9

FIG. 9A

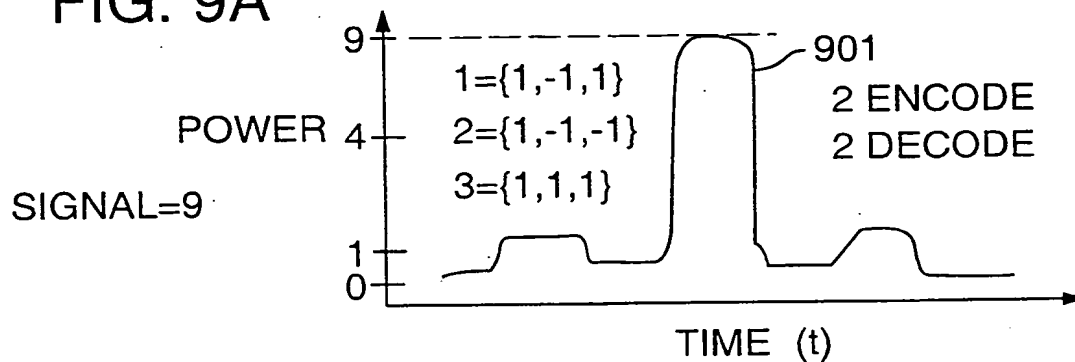


FIG. 9B


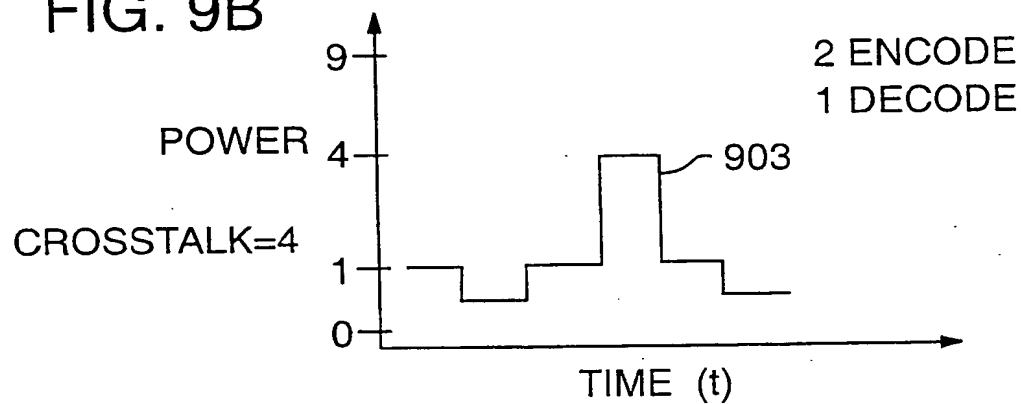


FIG. 9C

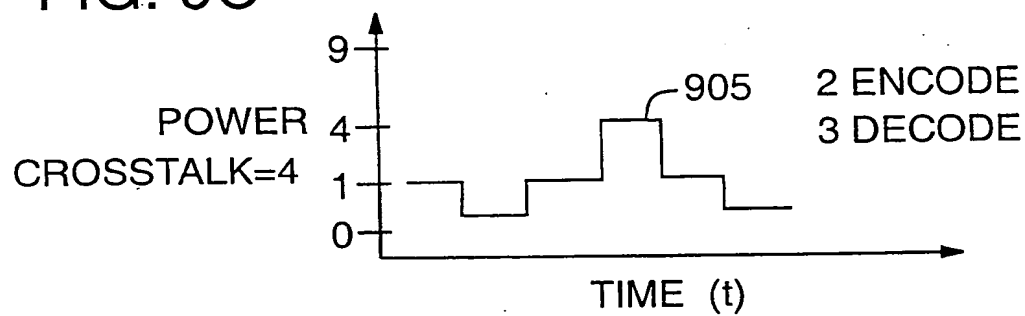

9/9

FIG. 10A

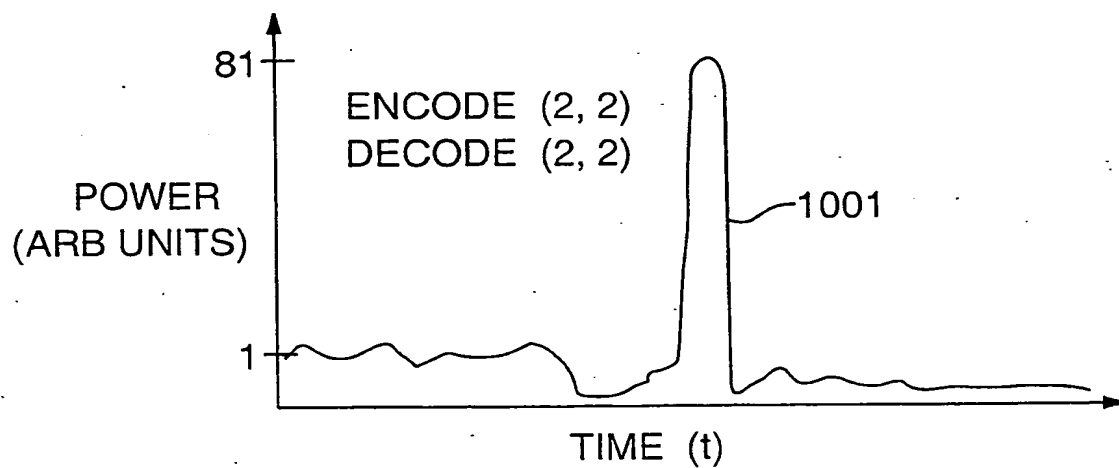


FIG. 10B


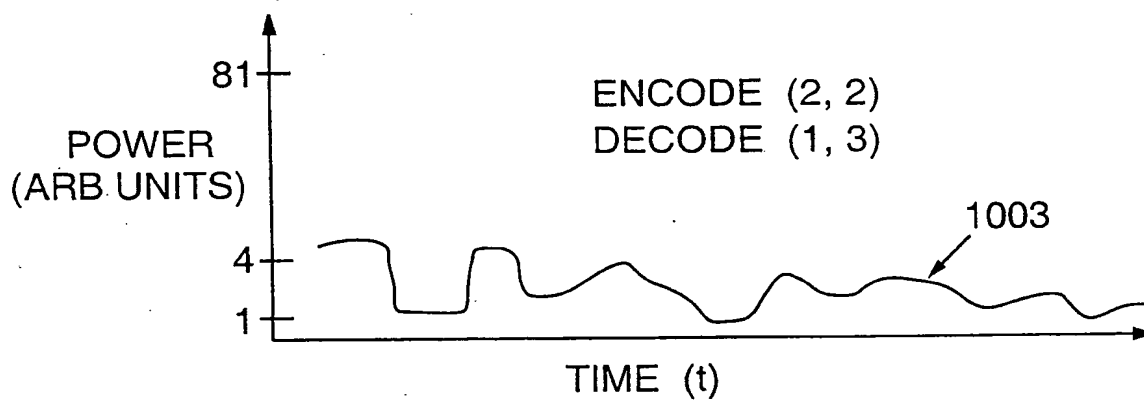


FIG. 10C

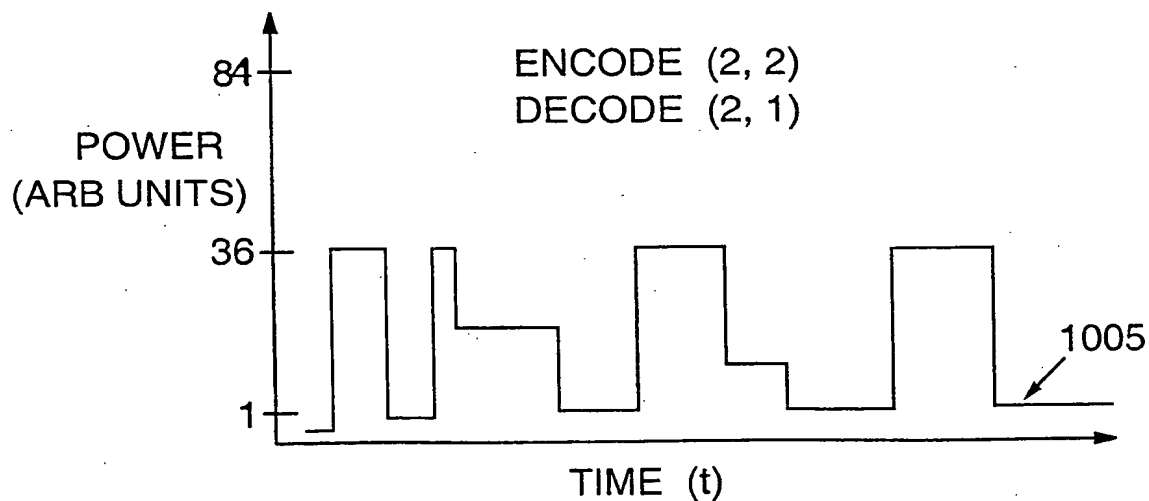

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/27257

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : Please See Extra Sheet.

US CL : US: 358/13; 385/37, 24; 359/559, 181, 130, 134; 370/441, 93

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : US: 358/13; 385/37, 24; 359/559, 181, 130, 134; 370/441, 93

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST, WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,742,416 A (MIZRAHI) 21 April 1998, col. 3, lines 52-67, col. 4, lines 1-67, col. 5, lines 36-67, col. 6, lines 1-67, col. 10, lines 14-67, col. 11, lines 1-62.	1-27
Y	US 5,712,932 A (ALEXANDER et al) 27 January 1998, col. 3, lines 54-67, col. 4, lines 1-67, col. 5, lines 1-67, col. 6, lines 1-67.	8-11
Y	US 5,748,349 A (MIZRAHI) 05 May 1998, col. 4, lines 9-67, col. 5, lines 1-67, col. 6, lines 1-67, col. 7, lines 1-52.	79, 19, 20, 27
Y	US 5,784,506 A (PFEIFFER) 21 July 1998, col. 2, lines 64-67, col. 3, lines 1-67, col. 4, lines 1-54.	1, 2, 25, 26

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

28 JANUARY 2000

Date of mailing of the international search report

18 FEB 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JASON CHAN

Telephone No. (303) 305-3900

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/27257

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim
Y	US 4,779,266 A (CHUNG et al) 18, October 1988, col. 3, lines 12-67.	8-11
Y	US 5,608,825 A (IP) 04 March 1997, col. 4, lines 24-54.	1-11, 25-27
Y	US 5,760,941 A (YOUNG et al) 02 June 1998, col. 9, lines 56-67, col. 10, lines 1-67, col. 13, lines 18-67, col. 14, lines 6-67, col. 16, lines 14-67, col. 18, lines 22-67.	25-27
Y	US 5,812,318 A (BABBITT et al) 22 September 1998, col. 14, lines 24-67.	8-11
Y	US 5,812,712 A (PAN) 22 September 1998, col. 2, lines 39-67, col. 3, lines 1-67, col. 4, lines 1-67.	7, 19, 20, 27
Y,P	US 5,987,197 A (KERSEY) 16 November 1999, col. 3, lines 56-67, col. 4, lines 1-67, col. 5, lines 1-67.	6, 7, 19, 20, 27
Y	US 5,638,473 A (BYRON) 10 June 1997, col. 3, lines 12-67, col. 4, lines 1-5.	1-7, 14, 21
Y	US 4,129,882 A (LIMB) 12 December 1978 , col. 2, lines 49-67, col. 3, lines 1-67, col. 4, lines 1-67, col. 5, lines 46-67, col. 6, lines 1-67.	1, 3, 4, 8-11, 1625, 26
Y	US 5,467,212 A (HUBER) 14 November 1995, col. 5, lines 65-67, col. 6, lines 1-67, col. 14, lines 2-67, col. 26, lines 47-67, col. 27, lines 1-67.	6, 7, 19, 20, 27
X,P	US 5,841,776 A (CHEN) 24 November 1998, col. 3, lines 54-67, col. 4, lines 1-67.	1, 3, 8, 25, 26

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/27257

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (6):



IPC(6): G02B 6/293, 6/28, 27/46, 6/34; H04J 14/02, 3/24, 13/00, 14/08; C02B 6/26; H04N 9/02



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G02B 6/293, 6/26, 6/28, 27/46, 6/34, H04J 14/02, 3/24, 13/00, 14/08, H04N 9/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/29887 (43) International Publication Date: 25 May 2000 (25.05.00)</p>
<p>(21) International Application Number: PCT/US99/27257 (22) International Filing Date: 17 November 1999 (17.11.99) (30) Priority Data: 60/108,700 17 November 1998 (17.11.98) US (71) Applicant: TEMPLEX TECHNOLOGY, INC. [US/US]; Suite #1, 1850 Millrace Drive, Eugene, OR 97403 (US). (72) Inventors: GRUNNET-JEPSEN, Anders; 3220 Twin Elms, Eugene, OR 97408 (US). JOHNSON, Alan, E.; 2384 Sony Loop, Eugene, OR 97404 (US). MANIOFF, Eric, S.; 3160 Alyndale Drive, Eugene, OR 97404 (US). MOSSBERG, Thomas, W.; 548 Lynnbrook Drive, Eugene, OR 97404 (US). MUNROE, Michael, J.; 1639 Walnut Street, Eugene, OR 97403 (US). SWEETSER, John, N.; 3230 Onyx Street, Eugene, OR 97405 (US). (74) Agent: JONES, Michael, D.; Klarquist, Sparkman, Campbell, Leigh & Whinston, LLP, One World Trade Center, Suite 1600, 121 SW Salmon Street, Portland, OR 97204 (US).</p>		<p>(81) Designated States: CA, CN, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With a revised version of the international search report.</i> (88) Date of publication of the revised version of the international search report: 8 September 2000 (08.09.00)</p>

(54) Title: CODES, METHODS, AND APPARATUS FOR OPTICAL ENCODING AND DECODING

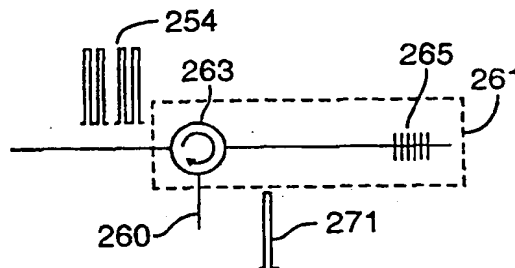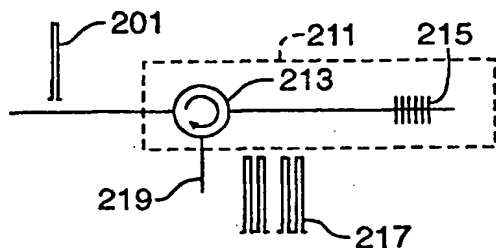

(57) Abstract

Encoders and decoders for applying composite codes to optical data signals include encoders (211, 231) and decoders (243, 261) for applying both subcodes and supercodes. The subcodes have a duration selected as less than or equal to an interchip duration or a chip duration of the supercodes. The encoders (211, 231) and decoders (243, 261) ("coders") include fiber Bragg gratings configured to encode or decode a subcode, a supercode, or a composite code. By coding with a subcode coder, a coder is reconfigurable by selecting different subcodes or supercodes. Communication systems and methods using composite codes are also described.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

REVISED
VERSION

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/27257

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : Please See Extra Sheet. US CL : US: 358/13; 385/37, 24; 359/559, 181, 130, 134; 370/441, 93 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : US: 358/13; 385/37, 24; 359/559, 181, 130, 134; 370/441, 93 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched NONE Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EAST, WEST		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,742,416 A (MIZRAHI) 21 April 1998, col. 3, lines 52-67, col. 4, lines 1-67, col. 5, lines 36-67, col. 6, lines 1-67, col. 10, lines 14-67, col. 11, lines 1-62.	1-27
Y	US 5,712,932 A (ALEXANDER et al) 27 January 1998, col. 3, lines 54-67, col. 4, lines 1-67, col. 5, lines 1-67, col. 6, lines 1-67.	8-11
Y	US 5,748,349 A (MIZRAHI) 05 May 1998, col. 4, lines 9-67, col. 5, lines 1-67, col. 6, lines 1-67, col. 7, lines 1-52.	79, 19, 20, 27
Y	US 5,784,506 A (PFEIFFER) 21 July 1998, col. 2, lines 64-67, col. 3, lines 1-67, col. 4, lines 1-54.	1, 2, 25, 26
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents	"F" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"N" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier document published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"X" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 28 JANUARY 2000	Date of mailing of the international search report 16 MAY 2000	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer JASON CHAN <i>James D. Matthews</i> Telephone No. (703) 305-3900	

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/US99/27257

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,779,266 A (CHUNG et al) 18, October 1988, col. 3, lines 12-67.	8-11
Y	US 5,608,825 A (IP) 04 March 1997, col. 4, lines 24-54.	1-11, 25-27
Y	US 5,760,941 A (YOUNG et al) 02 June 1998, col. 9, lines 56-67, col. 10, lines 1-67, col. 13, lines 18-67, col. 14, lines 6-67, col. 16, lines 14-67, col. 18, lines 22-67.	25-27
Y	US 5,812,318 A (BABBITT et al) 22 September 1998, col. 14, lines 24-67.	8-11
Y	US 5,812,712 A (PAN) 22 September 1998, col. 2, lines 39-67, col. 3, lines 1-67, col. 4, lines 1-67.	7, 19, 20, 27
Y,P	US 5,987,197 A (KERSEY) 16 November 1999, col. 3, lines 56-67, col. 4, lines 1-67, col. 5, lines 1-67.	6, 7, 19, 20, 27
Y	US 5,638,473 A (BYRON) 10 June 1997, col. 3, lines 12-67, col. 4, lines 1-5.	1-7, 14, 21
Y	US 4,129,882 A (LIMB) 12 December 1978, col. 2, lines 49-67, col. 3, lines 1-67, col. 4, lines 1-67, col. 5, lines 46-67, col. 6, lines 1-67.	1, 3, 4, 8-11, 16, 25, 26
Y	US 5,467,212 A (HUBER) 14 November 1995, col. 5, lines 65-67, col. 6, lines 1-67, col. 14, lines 2-67, col. 26, lines 47-67, col. 27, lines 1-67.	6, 7, 19, 20, 27
X,P	US 5,841,776 A (CHEN) 24 November 1998, col. 3, lines 54-67, col. 4, lines 1-67	1, 3, 8, 25, 26

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/27257

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (7):

IPC(6): G02B 6/293, 6/26, 6/28, 27/46, 6/34; H04J 14/02, 3/24, 13/00, 14/08; H04N 9/02